


ULT ULTIMATE SERIES OIL-PULSE TOOLS (SHUT-OFF TYPE)


STRAIGHT SQ. DRIVE TYPE




STRAIGHT HEX. SIZE TYPE

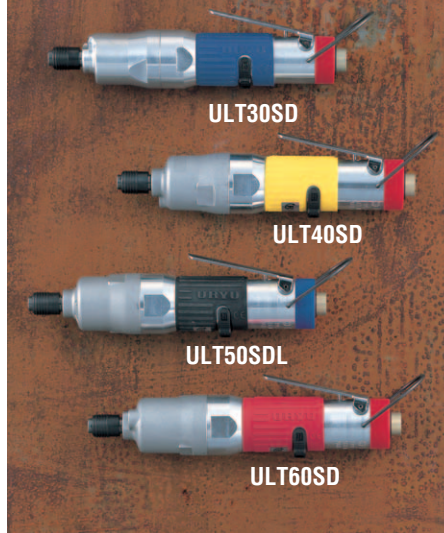


ANGLE TYPE




(Standard Type)



(Low Air Pressure Type)

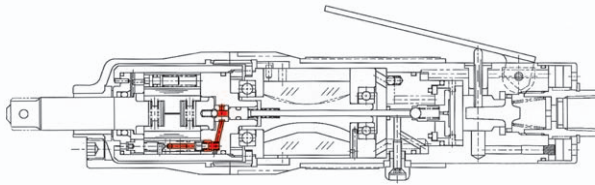

Head Sizes



MODEL	H		C		L	
	mm	in	mm	in	mm	in
ULT50C	45.5	1 51/64	16	5/8	12	15/32
ULT60C	45.5	1 51/64	16	5/8	12	15/32
ULT70C	54.5	2 9/64	18	45/64	16	5/8
ULT70CH	56.5	2 15/64	22	7/8	20	25/32

SPECIFICATIONS

Recommended Air Pressure: 0.4MPa(57psi)-0.6MPa(85psi)

Model	Capacity (Nominal Bolt Size)		Torque Range				Free Speed (Approx.) rpm		Overall Length less Socket or Bit (about)		Weight less Socket or Bit (about)		From Center to Outside (about)		Sq. Drive or Hex. Size		Average Air Consumption		Noise Level
	mm	in	0.4-0.5MPa		0.5-0.6MPa		0.4MPa	0.6MPa	mm	in	kg	lb	mm	in	mm	in	m ³ /min	ft ³ /min	dB(A)
			Nm	ft-lbs	Nm	ft-lbs													
ULT30SD	4-5	5/32-13/34	2.5-5.5	1.9-4.1	2.5-5.5	1.9-4.1	3300	3700	221	8 45/64	0.75	1.6	21.5	27/32	6.35	1/4	0.20	7.0	66
ULT40S	5	13/64	4.5-8.0	3.3-5.9	4.5-8.0	3.3-5.9	3200	3600	218	8 19/52	0.83	1.8	22.5	57/64	9.5	3/8	0.20	7.0	70
ULT40SD	5	13/64	4.5-8.0	3.3-5.9	4.5-8.0	3.3-5.9	3200	3600	221	8 11/16	0.83	1.8	22.5	57/64	6.35	1/4	0.20	7.0	70
ULT50S	6-8	1/4-5/16	-	-	7.0-15.5	5.2-11.5	-	4700	218	8 19/52	0.83	1.8	22.5	57/64	9.5	3/8	0.25	8.8	78
ULT50SD	6-8	1/4-5/16	-	-	7.0-15.5	5.2-11.5	-	4700	221	8 11/16	0.83	1.8	22.5	57/64	6.35	1/4	0.25	8.8	78
ULT60S	8	5/16	-	-	15-32	11.1-23.7	-	5400	229	9 1/64	0.87	1.9	22.5	57/64	9.5	3/8	0.30	10.5	80
ULT60SD	8	5/16	-	-	15-32	11.1-23.7	-	5400	232	9 9/64	0.87	1.9	22.5	57/64	6.35	1/4	0.30	10.5	80
ULT70S	8-10	5/16-3/8	-	-	30-50	22.2-37.0	-	4700	239	9 13/32	0.95	2.1	23.5	59/64	9.5	3/8	0.35	12.3	80
ULT50SL	6-8	1/4-5/16	7.0-15.5	5.2-11.5	-	-	4500	-	218	8 19/52	0.83	1.8	22.5	57/64	9.5	3/8	0.20	7.0	75
ULT50SDL	6-8	1/4-5/16	7.0-15.5	5.2-11.5	-	-	4500	-	221	8 11/16	0.83	1.8	22.5	57/64	6.35	1/4	0.20	7.0	75
ULT60SL	8	5/16	13-28	9.6-20.7	-	-	5000	-	229	9 1/64	0.87	1.9	22.5	57/64	9.5	3/8	0.25	8.8	77
ULT60SDL	8	5/16	13-28	9.6-20.7	-	-	5000	-	232	9 9/64	0.87	1.9	22.5	57/64	6.35	1/4	0.25	8.8	77
ULT70SL	8-10	5/16-3/8	25-45	18.5-33.3	-	-	4400	-	239	9 13/32	0.95	2.1	23.5	59/64	9.5	3/8	0.27	9.5	78
ULT50C	6-8	1/4-5/16	-	-	7.0-15.5	5.2-11.5	-	4800	250	9 27/32	1.35	3.0	24.5	31/32	9.5	3/8	0.25	8.6	78
ULT60C	8	5/16	-	-	13-28	9.6-20.7	-	5500	261	10 9/32	1.45	3.2	24.5	31/32	9.5	3/8	0.30	10.5	80
ULT70C	8	5/16	-	-	20-35	14.8-25.9	-	4600	275	10 53/64	1.65	3.6	26.5	1 3/64	9.5	3/8	0.35	12.3	82
ULT70CH	8-10	5/16-3/8	-	-	30-50	22.2-37.0	-	2300	290	11 27/64	1.85	4.1	26.5	1 3/64	12.7	1/2	0.35	12.3	82
ULT50CL	6-8	1/4-5/16	7.0-15.5	5.2-11.5	-	-	4400	-	250	9 27/32	1.35	3.0	24.5	31/32	9.5	3/8	0.20	7.0	75
ULT60CL	8	5/16	13-28	9.6-20.7	-	-	5000	-	261	10 9/32	1.45	3.2	24.5	31/32	9.5	3/8	0.25	8.6	78
ULT70CL	8	5/16	20-35	14.8-25.9	-	-	4200	-	275	10 53/64	1.65	3.6	26.5	1 3/64	9.5	3/8	0.27	9.5	78
ULT70CHL	8-10	5/16-3/8	30-50	22.2-37.0	-	-	2100	-	290	11 27/64	1.85	4.1	26.5	1 3/64	12.7	1/2	0.27	9.5	78

Air Inlet Size : NPT 1/4"

Air Hose Size : 10mm×6.5mm×5m for ULT30S~50S 12mm×8.0mm×5m for ULT60S~70S