

# U·UX·UXR SERIES OIL-PULSE TOOLS


PISTOL TYPE



U-WRENCH

The "U-WRENCH" is a combination tool of a standard air motor and a hydraulic pulse unit utilizing one-blade impulsing mechanism.

The high speed rotation of the air motor increases the oil pressure quickly in the front pulse unit to deliver repeated hydraulic pulse powers to the anvil for bolt and nut fastening and loosening job.

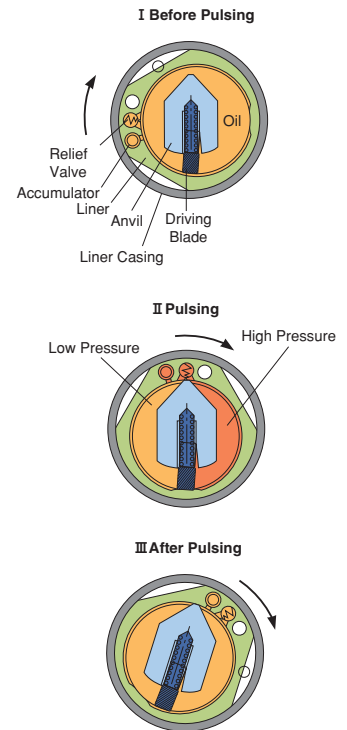

SPECIFICATIONS

Recommended Air Pressure:0.6MPa(85psi)

Model	Capacity (Nominal Bolt Size)		Torque Range				Free Speed (Approx.) rpm		Overall Length (about)		Weight less Socket or Bit (about)		From Center to Outside (about)		Sq. Drive or Hex. Size		Average Air Consumption		Noise Level
	mm	in	0.5MPa		0.6MPa		0.5MPa	0.6MPa	mm	in	kg	lb	mm	in	mm	in	m³/min	ft³/min	dB(A)
			Nm	ft-lbs	Nm	ft-lbs													
U-350D	3-4	No.8	3.0-5.0	2.2-3.7	3.5-5.8	2.5-4.2	10000	10500	154	6 1/16	0.77	1.7	22.0	7/8	6.35	1/4	0.15	5.3	74
U-410	4-5	No.8-No.10	6.0-8.5	4.4-6.3	7-10	5.0-7.2	10000	10500	177	7	1.00	2.2	22.0	7/8	9.5	3/8	0.15	5.3	70
U-410D	4-5	No.8-No.10	6.0-8.5	4.4-6.3	7-10	5.0-7.2	10000	10500	188	7 13/32	1.00	2.2	22.0	7/8	6.35	1/4	0.15	5.3	70
UX-450	5	No.10	7.7-13	5.7-9.6	9-15	6.5-11	9000	9500	147	5 25/32	0.85	1.9	22.0	7/8	9.5	3/8	0.20	7.0	65
UX-450D	5	No.10	6.8-12	5.0-8.9	8-14	5.8-10	9000	9500	152	5 63/64	0.85	1.9	22.0	7/8	6.35	1/4	0.20	7.0	65
UX-500	5-6	No.10-1/4	13-21	9.6-15.5	15-25	11-19	9000	9300	147	5 25/32	0.87	1.9	22.0	7/8	9.5	3/8	0.25	8.8	70
UX-500D	5-6	No.10-1/4	11-17	8.1-12.5	13-20	10-15	9000	9300	152	5 63/64	0.87	1.9	22.0	7/8	6.35	1/4	0.25	8.8	70
UX-612	6-8	1/4-5/16	17-30	12.5-22.1	20-35	15-25	9000	9300	160	6 5/16	0.95	2.1	22.5	7/8	9.5	3/8	0.32	11.2	75
UX-612D	6-8	1/4-5/16	13.5-24	10.0-17.7	16-28	12-20	9000	9300	165	6 1/2	0.95	2.1	22.5	7/8	6.35	1/4	0.32	11.2	75
UX-700	8	5/16	21-38	15.5-28.0	25-45	20-35	8700	9000	169	6 21/32	1.38	3.0	25.5	1	9.5	3/8	0.35	12.3	72
UX-700D	8	5/16	17-31	12.5-22.9	20-36	16-28	8700	9000	174	6 27/32	1.38	3.0	25.5	1	6.35	1/4	0.35	12.3	72
UX-800	8-10	5/16-3/8	30-51	22.1-37.6	35-60	25-45	8500	9000	175	6 7/8	1.70	3.7	28.0	1 7/64	9.5	3/8	0.40	14.1	75
UX-900	10	3/8	38-64	28.0-47.2	45-75	35-55	7300	7600	181	7 1/8	1.88	4.1	30.0	1 3/16	12.7	1/2	0.42	14.7	75
UX-1000	10-12	3/8-1/2	43-81	31.7-59.8	50-95	40-70	6500	6800	187	7 23/64	2.20	4.8	33.0	1 19/64	12.7	1/2	0.51	17.9	75
UX-1300	12-14	1/2-9/16	68-110	50.2-81.2	80-130	60-95	5800	6200	205	8 5/64	2.70	5.9	36.0	1 27/64	12.7	1/2	0.55	19.4	77
UX-1400	14	9/16	85-135	62.7-99.6	100-160	75-120	5000	5300	224	8 13/16	3.20	7.0	40.0	1 37/64	12.7	1/2	0.60	21.1	79
UX-1620	14-16	9/16-5/8	100-160	73.8-118.1	120-190	90-140	4700	5000	241	9 1/2	3.60	7.9	40.0	1 37/64	19.0	3/4	0.65	22.9	82
UXR-1820	16-18	5/8-45/64	135-215	99.6-158.7	160-250	120-185	4400	4600	242	9 17/32	4.10	9.0	42.0	1 21/32	19.0	3/4	0.75	26.3	84
UXR-2000	18-20	45/64-25/32	255-385	188.2-284.1	300-450	220-330	4000	4200	282	11 3/32	6.50	14.3	47.0	1 27/32	19.0	3/4	0.90	31.5	85

Air Inlet Thread : NPT1/4" for U-350D~UX-1620  
 NPT3/8" for UXR-1820 & UXR-2000  
 Air Hose Size : 6.35mm (1/4") for U-350D~UX-500D  
 9.5mm (3/8") for UX-612~UX-1620  
 12.7mm (1/2") for UXR-1820 & UXR-2000