


UL SERIES OIL-PULSE TOOLS

PISTOL TYPE



IMPROVED WEIGHT & SIZE

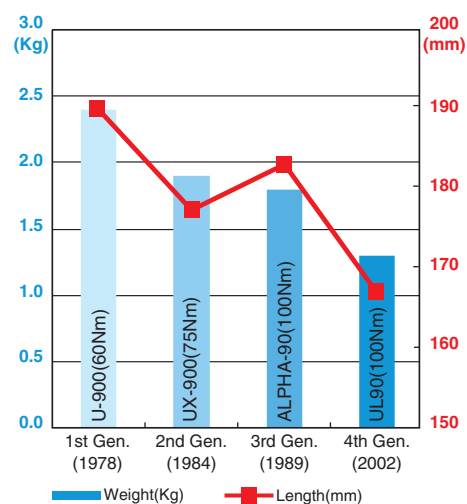

SPECIFICATIONS

Recommended Air Pressure: 0.5MPa(72psi)-0.6MPa(85psi)

Model	Capacity (Nominal Bolt Size)		Torque Range				Free Speed (Approx.) rpm		Overall Length Less Socket or Bit (Approx.)		Weight less Socket or Bit (Approx.)		From Center to Outside (Approx.)		Sq. Drive or Hex. Size		Average Air Consumption		Noise Level
	mm	in	0.5MPa		0.6MPa		0.5MPa	0.6MPa	mm	in	kg	lb	mm	in	mm	in	m ³ /min	ft ³ /min	dB(A)
			Nm	ft-lbs	Nm	ft-lbs													
UL30	5	13/64	5.5-10.5	4.1-7.8	6-12	4.4-8.9	5400	5700	131	5 5/32	0.70	1.5	20.5	13/16	9.5	3/8	0.20	7.0	75
UL30(TM)	5	13/64	5.5-10.5	4.1-7.8	6-12	4.4-8.9	5400	5700	131	5 5/32	0.70	1.5	20.5	13/16	9.5	3/8	0.20	7.0	75
UL30D	5	13/64	5.5-10.5	4.1-7.8	6-12	4.4-8.9	5400	5700	135	5 5/16	0.70	1.5	20.5	13/16	6.35	1/4	0.20	7.0	75
UL30D(TM)	5	13/64	5.5-10.5	4.1-7.8	6-12	4.4-8.9	5400	5700	135	5 5/16	0.70	1.5	20.5	13/16	6.35	1/4	0.20	7.0	75
UL40	5-6	13/64-1/4	11-20	8.1-14.8	13-22	9.6-16.3	5800	6100	131	5 5/32	0.70	1.5	20.5	13/16	9.5	3/8	0.20	7.0	75
UL40(TM)	5-6	13/64-1/4	11-20	8.1-14.8	13-22	9.6-16.3	5800	6100	131	5 5/32	0.70	1.5	20.5	13/16	9.5	3/8	0.20	7.0	75
UL40D	5-6	13/64-1/4	9-17	6.7-12.6	11-20	8.1-14.8	5800	6100	135	5 5/16	0.70	1.5	20.5	13/16	6.35	1/4	0.20	7.0	75
UL40D(TM)	5-6	13/64-1/4	9-17	6.7-12.6	11-20	8.1-14.8	5800	6100	135	5 5/16	0.70	1.5	20.5	13/16	6.35	1/4	0.20	7.0	75
UL50	6-8	1/4-5/16	20-32	14.8-23.7	22-35	16.3-25.9	6100	6400	139	5 25/64	0.77	1.7	22.0	55/64	9.5	3/8	0.30	10.5	78
UL50(TM)	6-8	1/4-5/16	20-32	14.8-23.7	22-35	16.3-25.9	6100	6400	139	5 25/64	0.77	1.7	22.0	55/64	9.5	3/8	0.30	10.5	78
UL50D	6-8	1/4-5/16	16-25	11.8-18.5	18-28	13.3-20.7	6100	6400	144	5 43/64	0.77	1.7	22.0	55/64	6.35	1/4	0.30	10.5	78
UL50D(TM)	6-8	1/4-5/16	16-25	11.8-18.5	18-28	13.3-20.7	6100	6400	144	5 43/64	0.77	1.7	22.0	55/64	6.35	1/4	0.30	10.5	78
UL60	8	5/16	30-45	22.2-33.3	32-50	23.7-37.0	6700	7000	139	5 25/64	0.82	1.8	22.0	55/64	9.5	3/8	0.40	14.0	80
UL60(TM)	8	5/16	30-45	22.2-33.3	32-50	23.7-37.0	6700	7000	139	5 25/64	0.82	1.8	22.0	55/64	9.5	3/8	0.40	14.0	80
UL60D	8	5/16	20-32	14.8-23.7	22-35	16.3-25.9	6700	7000	142	5 19/32	0.82	1.8	22.0	55/64	6.35	1/4	0.40	14.0	80
UL60D(TM)	8	5/16	20-32	14.8-23.7	22-35	16.3-25.9	6700	7000	142	5 19/32	0.82	1.8	22.0	55/64	6.35	1/4	0.40	14.0	80
UL70	8-10	5/16-3/8	36-60	26.6-44.4	40-65	29.6-48.1	5400	5700	151	5 55/64	0.95	2.1	23.0	29/32	9.5	3/8	0.45	15.8	80
UL70(TM)	8-10	5/16-3/8	36-60	26.6-44.4	40-65	29.6-48.1	5400	5700	151	5 55/64	0.95	2.1	23.0	29/32	9.5	3/8	0.45	15.8	80
UL90	10-12	3/8-1/2	55-90	40.7-66.6	60-100	44.4-74.0	5700	6000	168	6 39/64	1.30	2.9	27.0	1 1/16	12.7	1/2	0.53	18.6	82
UL90(TM)	10-12	3/8-1/2	55-90	40.7-66.6	60-100	44.4-74.0	5700	6000	168	6 39/64	1.30	2.9	27.0	1 1/16	12.7	1/2	0.53	18.6	82
UL100	12	1/2	72-120	53.3-88.8	80-130	59.2-96.2	5100	5400	175	6 57/64	1.66	3.7	29.5	1 5/32	12.7	1/2	0.58	20.3	80
UL100(TM)	12	1/2	72-120	53.3-88.8	80-130	59.2-96.2	5100	5400	175	6 57/64	1.66	3.7	29.5	1 5/32	12.7	1/2	0.58	20.3	80

Air Inlet Size : NPT1/4"

Air Hose Size : 10mm×6.5mm×5m for UL30-50 12mm×8.0mm×5m for UL60-100